


CompacLift™ X Series Scissor Lift Tables

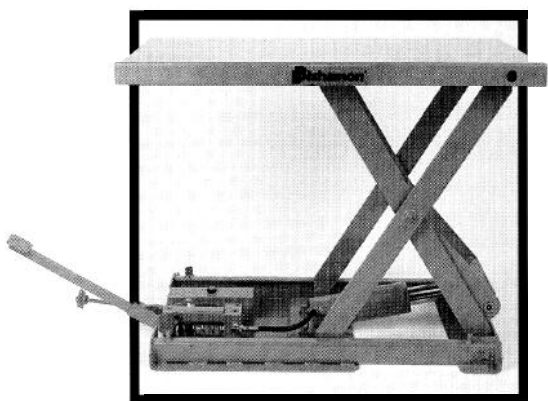

Compact,
Hydraulic
440 to 1,650 lb.
Capacity
For Surface
Installation

x-75c
Scissor Lift Table

Model Number Format

x- 75c

Series "X" _____
Scissor Lift Table _____
Capacity _____
75 = 1,650 lbs.
Power _____
C = Manual
E = Electric
P = Pneumatic

Description

Bishamon X Series Scissor Lift Tables are rugged, compact hydraulic lifts with capacities of 440 to 1,650 lbs., travel distance to 44 3/4 in. with table size of 18 x 25 1/2 to 20 x 40 in!

All Bishamon Lift Tables are designed and constructed for lifting applications under the toughest working conditions, offering years of trouble-free operation. They reflect over 50 years of proven Bishamon performance.

Standard Features

- Rugged construction, with heavy gauge steel and sturdy continuous welds throughout
- Steel work platforms
- Compact design
- 440 to 1,650 lbs. capacities
- Fifteen models in the series
- Superior hydraulic systems proven on a range of Bishamon lift products
- Hand Control on electric version
- Removable-storable operator's foot pedal and lowering control on basic models
- Wide range of table sizes
- Surfaces cleaned and a quality baked enamel finish applied

Limited Warranty Policy

1 year replacement on materials and manufacturing process. Please refer to actual Warranty for specific details.

Specifications are subject to change without notice.

X Series Lift Tables are one of a group of Bishamon Lift Tables and other materials handling products.

| Selector Table for X Series. Capacities 440 to 1.650 lbs. | | | | | | | | | | |
|---|----------|-------------------|----------------------|-----------------|--------|------------------------------|------------------|-----------------------------|-----------------|----------|
| Travel | Model | Capacity (pounds) | Table Sizes (inches) | Height (inches) | | Strokes to Max. Hgt C Models | Voltage E Models | Air Pressure (psi) P Models | Weight (pounds) | Price |
| | | | | Lowered | Raised | | | | | |
| 16" | 1 x-20c | 440 | 19 1/2 x 25 1/2 | 5 | 21 | 28 | --- | --- | 121 | \$ 745 I |
| 22" | X-25C | 550 | 19 1/2 x 32 | 6 | 28 | 42 | . | . | 157 | \$ 820 |
| | X-25E | 550 | 19 1/2 x 32 | 6 | 28 | . | 110 | . | 190 | 1,495 |
| | X-25P | 550 | 19 1/2 x 32 | 6 | 28 | . | . | 100 | 190 | 1,495 |
| 25 1/2" | x-50c | 1,100 | 20x40 | 6 | 31 1/2 | 46 | . | . | 253 | \$ 995 |
| | X-50E | 1,100 | 20x40 | 6 | 31 1/2 | . | 110 | . | 285 | 1,695 |
| | x-50P | 1,100 | 20x40 | 6 | 31 1/2 | . | . | 100 | 285 | 1,695 |
| 25 1/2" | X-75C | 1,650 | 20x40 | 6 | 31 1/2 | 67 | . | . | 256 | 1,075 |
| | X-75E | 1,650 | 20x40 | 6 | 31 1/2 | . | 110 | . | 288 | 1,745 |
| | x-75P | 1,650 | 20x40 | 6 | 31 1/2 | . | . | 100 | 288 | 1,745 |
| 45 3/4" | x-30SC* | 660 | 20x40 | 9 1/4 | 54 | 54 | . | . | 315 | \$1,195 |
| | X-30SE* | 660 | 20x40 | 9 1/4 | 54 | . | 110 | . | 345 | 1,780 |
| | X-30SP* | 660 | 20x40 | 9 1/4 | I 54 | . | . | 100 | 345 | 1,780 |
| 25 1/2" | X-50SE* | 1,100 | 18 x 25 1/2 | 8 1/4 | 33 3/4 | . | 110 | . | 235 | CALL |
| | X-50SP*1 | 1,100 | 18 x 25 1/2 | 8 1/4 | 33 3/4 | . | . | 100 | 235 | CALL |

**"S" means double scissiors.

Optional Foot Switch add \$125 on electric models.