


Lo-Profile" LX Series Scissor Lift Tables

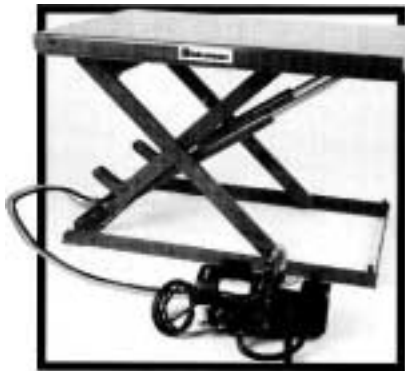

**Low Profile,
Electrohydraulic
550 to 4,400 lb.
Capacity
For Surface
Installation**

LX-100W

Model	Number	Format
Series "LX"		LX-25 S
Low Profile		Lift Table
Capacity		25=550 lbs.
Size		
S		Short
L		Long
W		Wide
N		Narrow

Description

Lo-Profile collapses to 2.9", the lowest profile available and less than half the height of normal lift tables. Even the 4,400 lb capacity model goes down to 4.3". Allows you to load a lift easily, without the need for a pit.

All Bishamon Lift Tables are designed and constructed for lifting applications under the toughest working conditions, offering years of trouble-free operation. They reflect over 50 years of proven Bishamon performance.

Standard Features

■ Rugged construction, with heavy gauge steel and sturdy welds throughout

- Steel work platforms
- Compact design
- 550 to 4,400 lbs. capacities
- Nine models in the series
- Superior hydraulic systems proven on a range of Bishamon lift products
- Hydraulic hose 8' long
- Hand control on 8' cord
- Four-sided electric perimeter toeguard
- Remote power unit
- Wide range of table sizes
- Surfaces cleaned and a quality baked enamel finish applied

Limited Warranty Policy

1 year replacement on materials and manufacturing process. Please refer to actual Warranty for specific details.

Specifications are subject to change without notice.

LX Series Lift Tables are one of a group of Bishamon Lift Tables and other materials handling products.

Selector Table for LX Series. Capacities 550 to 4,400 lbs.

Model	Capacity (pounds)	Table (width x length)	Table Height (inches)		Motor 60 HZ	Power Units (see notes)	Speed (seconds)*			Ship Weight (pounds)	Price	Opt. Loading Ramp Price**
			Minimum	Maximum			Up Loaded	Empty	Down			
LX-25s	550	23 1/4 x 32 1/4	2.9	20.9	115V, 1PH	note 1	6.5	5.2	5	213	\$2,110	\$225
LX-25L	550	23 1/4 x 40	2.9	30.0	115V, 1PH	note 1	10.0	8.0	8	257	2,160	225
LX-50s	1100	23 1/4 x 32 1/4	2.9	20.9	115V, 1PH	note 1	13.0	10.4	8	228	\$2,495	\$225
LX-50L	1100	23 1/4 x 40	2.9	30.0	115V, 1PH	note 1	20.0	16.0	10	277	2,550	225
LX-100W	2200	34 1/4 x 51	3.3	38.6	230V, 1 or 3PH	note 2 or 3	11.0	9.5	15	606	\$3,450	\$225
LX-100N	2200	24 x 51	3.3	38.6	230V, 1 or 3PH	note 2 or 3	11.0	9.5	14	490	3,375	225
LX-200WM	4400	45 1/2 x 61-1/2	4.3	39.4	230V, 1 or 3PH	note 2 or 3	23.0	20.0	3.6	1110	\$4,550	\$300
LX-200N	4400	33 1/2 x 55-1/2	4.3	39.4	230V, 1 or 3PH	note 2 or 3	23.0	20.0	3.6	860	4,495	300
LX-200WL	4400	45-1/2 x 81	4.3	39.4	230V, 1 or 3PH	note 2 or 3	23.0	20.0	3.6	1238	4,650	300

Optional foot switch available on Electric Models for an additional \$125.

*These times are approximate

** Add \$75 for special pallet jack access ramp.

1. J.S.B. 2HP, 115 volt, single phase, 8.8 amps 60Hz 1725 rpm, 56Y frame, TEFC, continuous duty. .09792 in³/rev displacement, .73gpm nominal @ low pressure .58 gpm @ 1850psi, relief valve set at full bypass at 2300psi.
2. J.S.B. 2HP, 208-230 volt, single phase, 11.0 amps 60Hz 3450 rpm, 56Y frame, TENV, 15 min. duty. .12936 in³/rev displacement, 2.01gpm nominal @ low pressure 1.75 gpm @ 2500psi, relief valve set at full bypass at 2000psi.
3. J.S.B. 2HP, 208-230 volt, three phase, 5.8 amps 60Hz 3450 rpm, 56Y frame, TEFC, 30 min. duty. .12936 in³/rev displacement, 2.01gpm nominal @ low pressure 1.75 gpm @ 2500psi, relief valve set at full bypass at 3000psi.

Order loading ramp to match any of the above lift tables by indicating which model desired. All specifications subject to change. Optional oversize ramps available.